Industry: Refining
Process: Bitumen handling
Product: Class 150 4" Cavity Free Piggable valve
End use: Conveyance of grease / Wash-down oil

www.pbmvalve.com

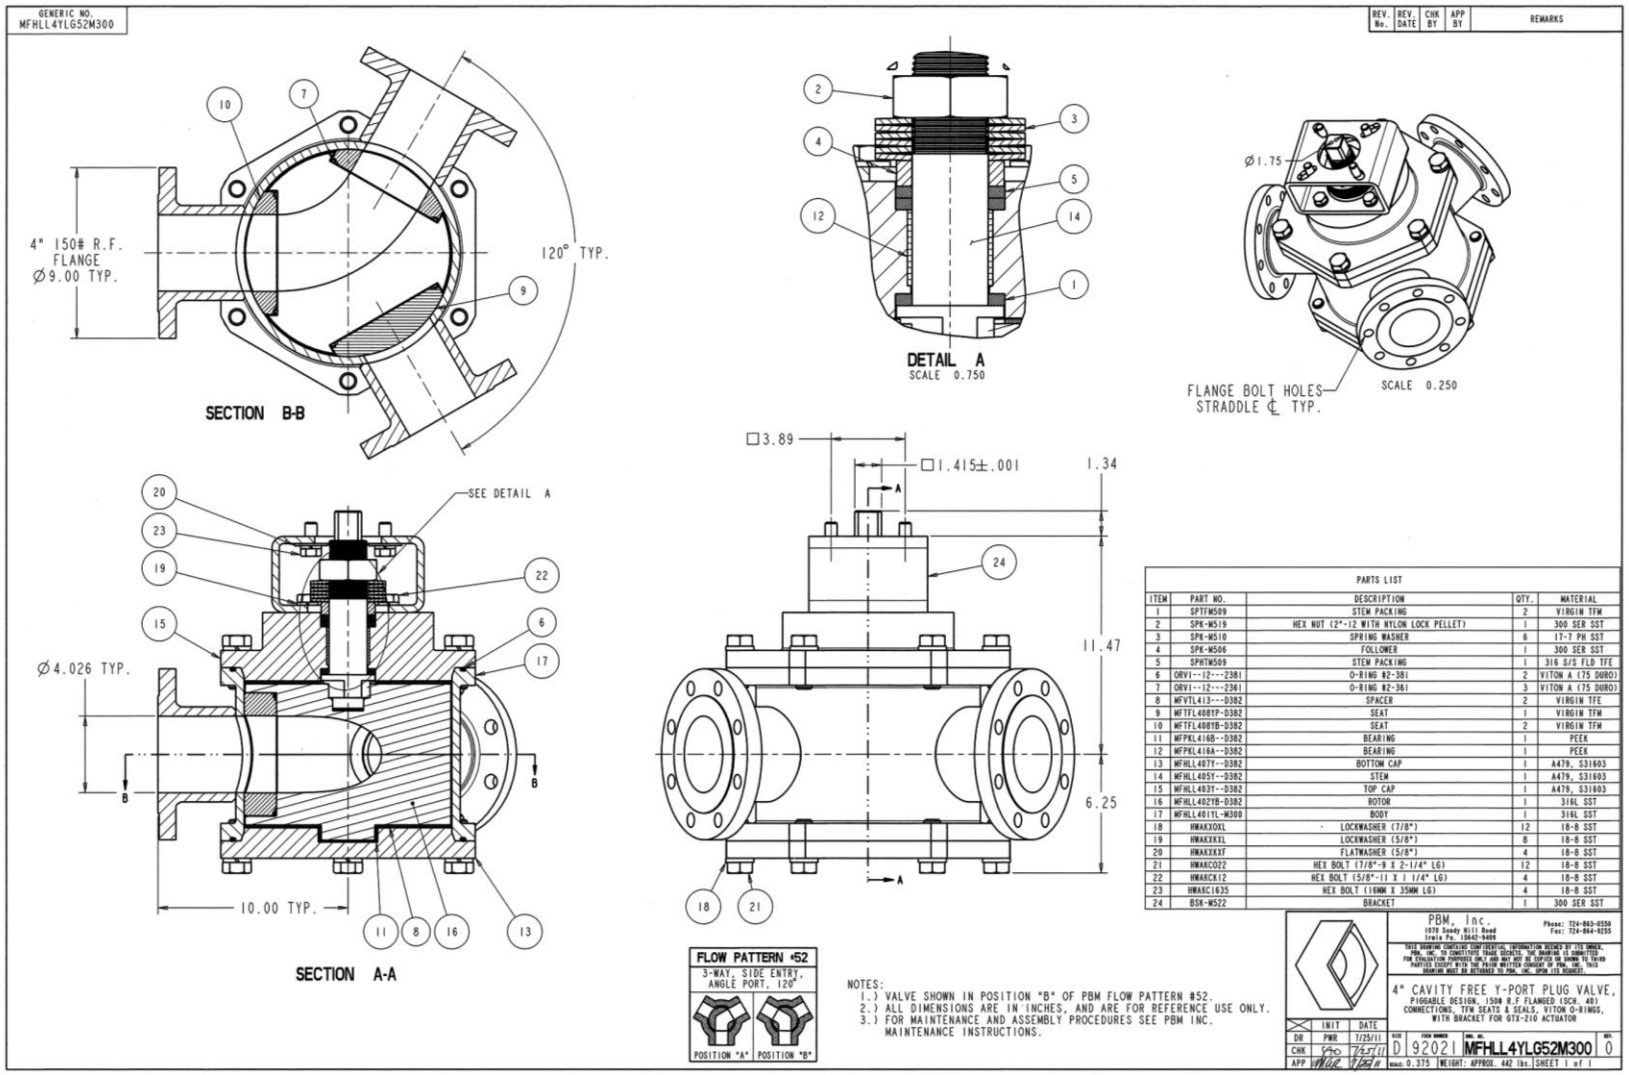

Application Brief: PBM 4-way cavity free pigging valves are used in Australia at a facility housing bitumen and specialty products, fuel storage including LPG, lubricants and grease manufacturing facility, and several warehouses. These valves operate at 60-100°C / 140-212°F, 600kPa / 87psi.

APPL 0111-67